

FBHE Series **SMD EMI Suppression Ferrite Bead** **Size 1812**



CHARACTERISTICS


- Monolithic inorganic material construction.
- Closed magnetic circuit avoids crosstalk.
- Suitable for reflow soldering.
- Available in various sizes.
- Quantity: 1000pcs

APPLICATION

- Data lines and low power lines
- Connection between digital and analog circuit

Dimensions: [mm]

Land Pattern: [mm]

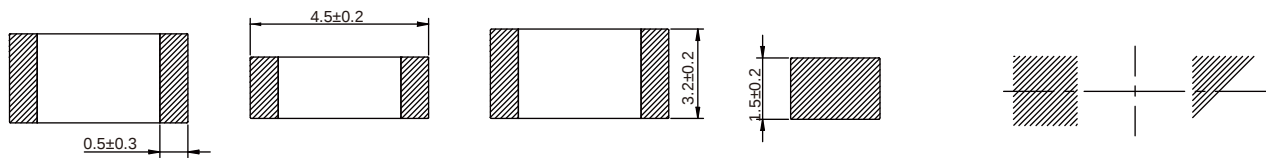

Electrical Properties:

Part No	Impedance @100MHz (Ω)	Tolerance	DCR (max) (Ω)	Temperature Rise Current (max) (mA)
		±25%		
		±25%		
		±25%		
		±25%		
		±25%		
		±25%		

Operating Temperature: -55℃ ~ +125℃
 Temperature rise current the actual value of DC current when the temperature rise is ΔT40℃

Impedance & Frequency Characteristics:

