



MDTA Series




FEATURES

- Flat wire coil for low copper losses
- #
- †
- High current capability
- AE# j
- \ C @
- j

APPLICATION

-) #) # Noise suppr for motor wipers / power seats/ =@
- Q) ers

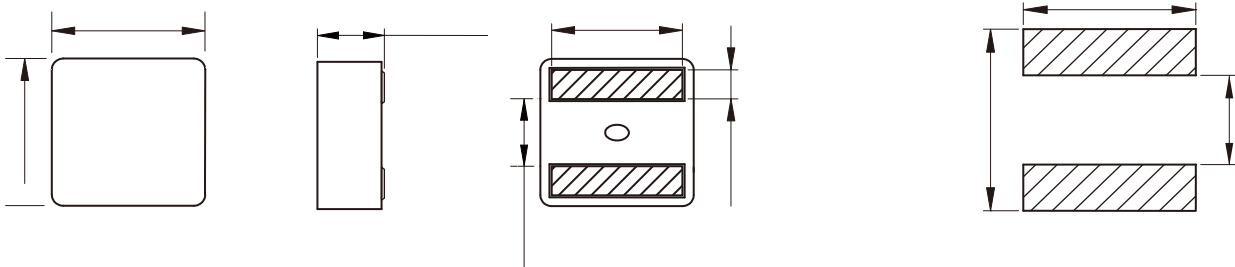

Part No	L@100KHz /0.1V (μH)	Tolerance	I _{SAT} Typ. (A)	I _R (A)		R _{DC} Max. (mΩ)
				20°C rise	40°C rise	
U) u° k U		±20%				
U) u° k U		±20%				
U) u° k U		±20%				
U) u° k U		±20%				
U) u° U		±20%				
U) u° U		±20%				
U) u° U	22	±20%				
U) u° U		±20%				

