

## MDTE Series


Wire Wound Molded SMD Power Inductors

Size 1580


### FEATURES

- So saturation
- High current, low DCR, high efficiency
- 
- 
- 
- 
- 

Dimensions: [mm]

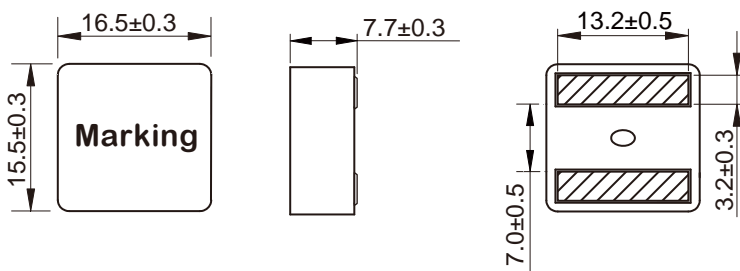


Land Pattern: [mm]



Electrical Properties:

## Soldering Reflow:

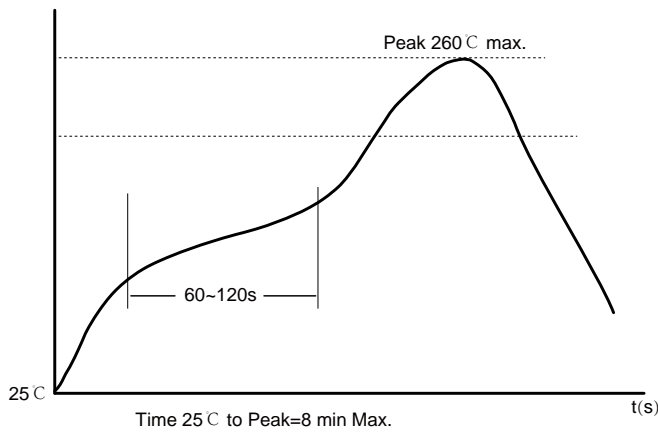

Preheat condition: 150 ~200°C / 60~120 sec.

Allowed time above 217°C: 60~90 sec.

Max temperature: 260°C.

Max time at max temperature: 10 sec.


Allowed Reflow time: 2x max.

## Packaging Information:

### Tape Dimension:

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
MDTE1580	17.0±0.1	16.0±0.1	1.5±0.1	4.0±0.1	24.0±0.1	32.0±0.3	8.5±0.1	1.75±0.1	0.5±0.05

### Peel force of top cover tape:

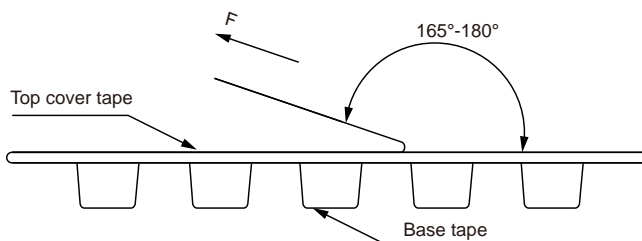

The peel force of top cover tape shall be between 0.1 to 1.3 N

Reel Dimension: [mm]



Packaging Quantity: